


ULTRADUAL SL1 Installation Guide

SECTION 1 - Approved Substrates

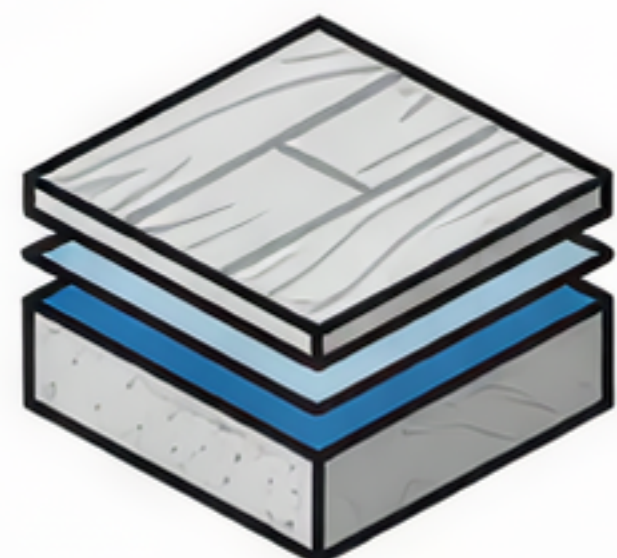

Approved Substrates:

- ✓ Dry Concrete
- ✓ Interior Plywood
- ✓ OSB
- ✓ Gypcrete
- ✓ Cement Backer Units



- Carpet
- Ceramic Tile
- Vinyl
- Peel-and-Stick
- VCT

SECTION 2 - Installation Steps


1



Preparation:

Flat, clean, dry subfloor (1/8" over 6')

2

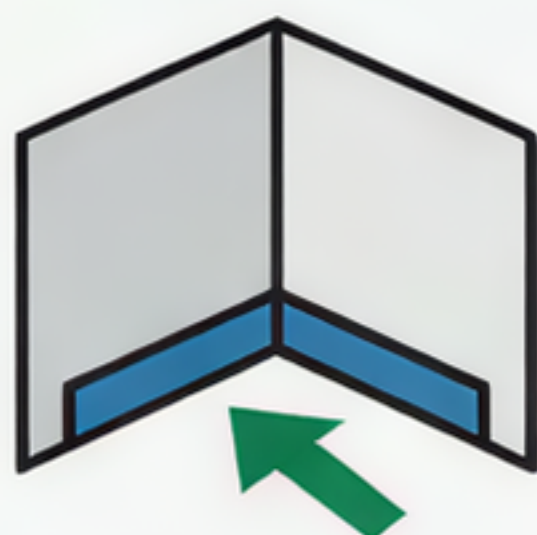

Start in corner:

Tape strip to wall

3



Unroll:

With ULTRADUAL logo facing up


4



Trim edges:

1/4" gap from walls

5

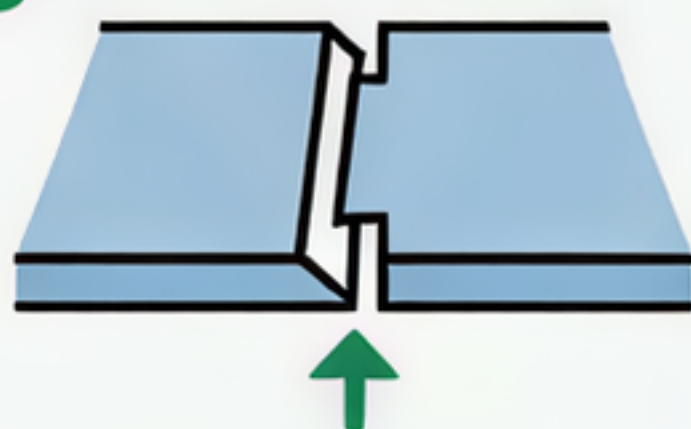

Seam:

Butt foam edges, use lip-and-tape system


6



Alternative:

Single-faced tape for seams


7

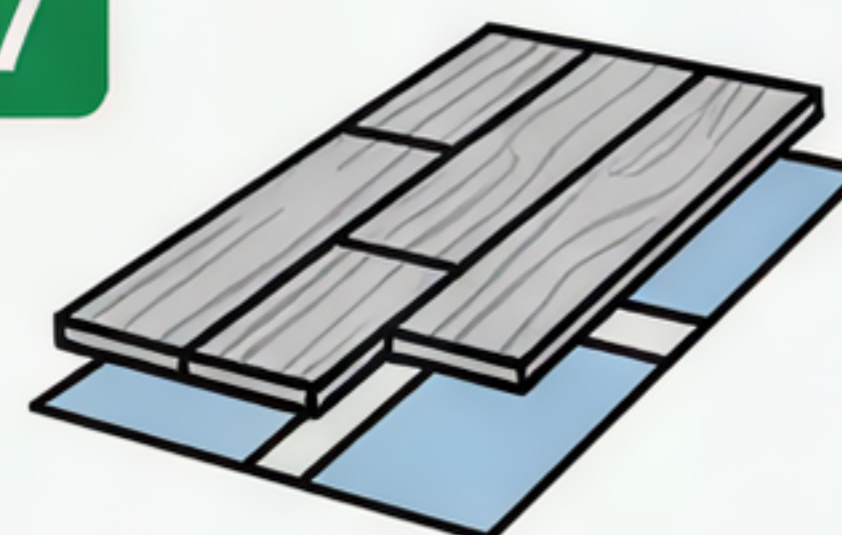


Install flooring:

Per manufacturer instructions


SECTION 3 - Key Details

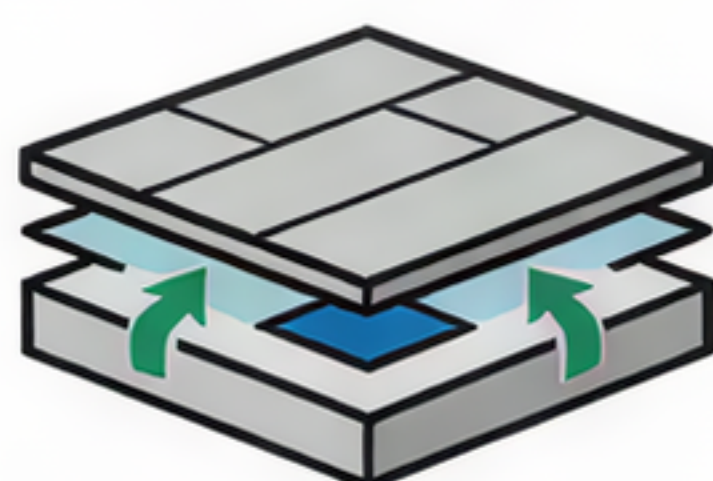

Floating Floor Installation

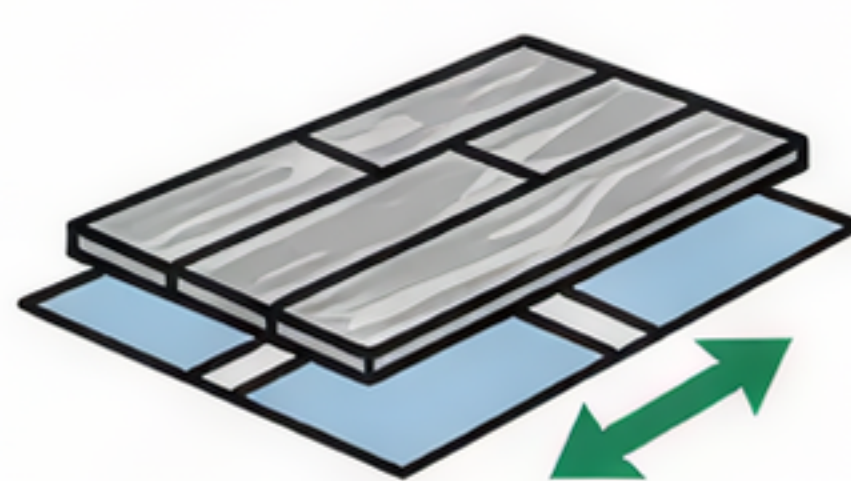

Seams perpendicular to planks

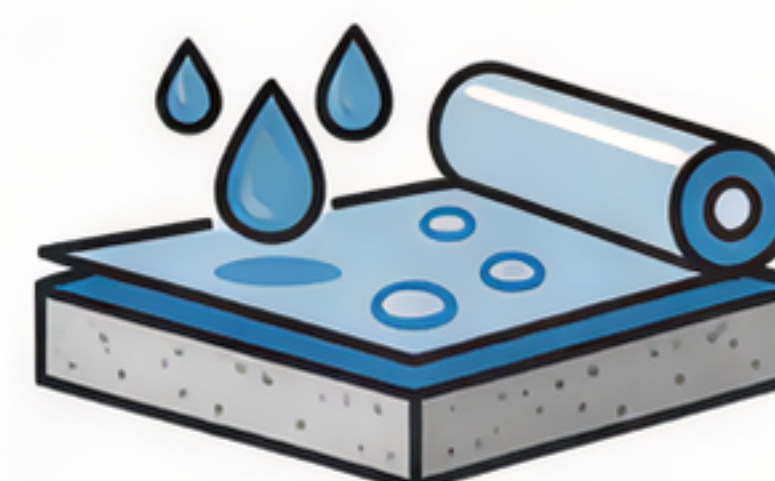

Moisture-prone concrete: use sealant or 6 mil polyethylene vapor barrier