


ULTRA FLOW

BD6

6 MIL BLACK PE MOISTURE BARRIER

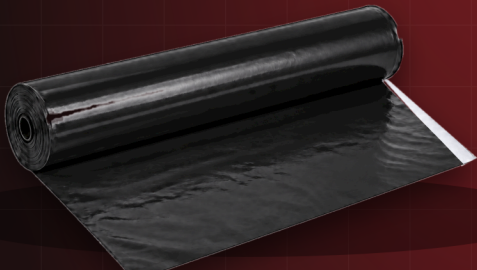

CONTINUOUS MOISTURE-CONTROL LAYER

6 mil polyethylene film, approx. 0.15 mm



INTEGRATED WHITE TAPE EDGE

One-sided release liner helps seal overlapped runs



CORELESS ROLL | LIGHTWEIGHT | EASY TO HANDLE

PRODUCT STANDARD

6 MIL BLACK POLYETHYLENE

APPROX. 0.15 MM THICK | 48 IN NOMINAL WIDTH

100 / 300 SQ.FT. PER ROLL | TWO PACKAGING OPTIONS

TESTED TO ASTM E96/E96M

WATER VAPOR PERMEANCE: 0.06 PERM

CLASS I VAPOR RETARDER

FOR APPROVED FLOATING FLOOR SYSTEMS

LVP / LVT

SPC

LAMINATE

ENGINEERED WOOD

INSTALLATION STANDARD

PREP | ROLL OUT | OVERLAP | PEEL + SEAL | INSTALL FLOOR

Always follow the flooring manufacturer's written installation instructions.