

ULTRAFLOW

BD6


6 MIL PE MOISTURE BARRIER FILM

A dedicated accessory for select DOTFLOOR and SuperOak floating-floor systems.



100 SQ. FT.

48 IN X 4 FT X 25 FT

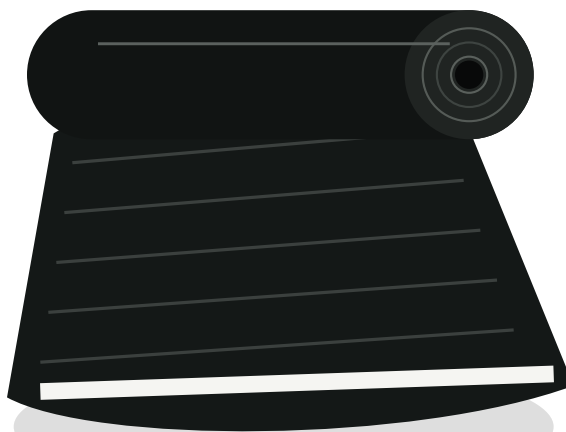

300 SQ. FT.

48 IN X 4 FT X 75 FT

6 MIL

APPROX. 0.15 MM

48 IN

NOMINAL ROLL WIDTH

2 SIZES

100 / 300 SQ. FT.

LOOSE LAY

APPROVED FLOATING FLOORS

FOR APPROVED FLOATING INSTALLATIONS



LVP / LVT



SPC



LAMINATE



ENG. WOOD

COMPATIBILITY MUST BE CONFIRMED FOR THE EXACT FLOORING MODEL

Follow the flooring manufacturer instructions and applicable local requirements.

PRODUCT DATA

SPECIFICATIONS + USE LIMITS

Confirmed product facts, installation scope, and vapor-retarder performance.

	BD6-100	BD6-300
Coverage	100 sq. ft.	300 sq. ft.
Nominal roll size	4 ft x 25 ft	4 ft x 75 ft
Nominal width	48 in	48 in
Nominal thickness	6 mil / approx. 0.15 mm	6 mil / approx. 0.15 mm
Material / color	Solid black polyethylene film	
Installation	Loose-laid, overlapped, sealed with integrated tape edge	
Cushion / sound rating	None claimed - this is film, not foam underlayment	
Use scope	Select floating LVP/LVT, SPC, laminate, engineered wood	
Not for	Glue-down, nail-down, active leaks, standing water	

SYSTEM POSITION

APPROVED FLOATING FLOOR	VAPOR PERFORMANCE TESTED TO ASTM E96/E96M WATER VAPOR PERMEANCE 0.06 PERM CLASS I VAPOR RETARDER
PAD-ATTACHED FLOORING (WHEN PERMITTED)	
ULTRAFLOW BD6 - FILM + WHITE TAPE EDGE	
CLEAN, DRY, FLAT, STRUCTURALLY SOUND SUBFLOOR	

INSTALLATION AT A GLANCE

01 PREP	02 ROLL OUT	03 OVERLAP + TAPE	04 TURN UP + TRIM	05 INSTALL FLOOR
------------	----------------	----------------------	----------------------	---------------------

Peel the white release liner and press the integrated tape edge firmly at overlaps. Use compatible moisture-resistant tape at cut ends and repairs.